

USB P3K User's Guide

mplat

614-85 Gamble Ave.

Toronto .Ontario

M4K 2H6 CANADA

Table of content

Table of content.....	2
1. Introduction.....	3
1.1 Overview	3
1.2 Package list	4
2. Quick Start.....	5
2.1 Plug the USB P3K into the USB port.....	5
2.2 Download the Skype software and apply an account if necessary	6
2.3 Install Skype and launch Skype	6
2.4 Download SkypeMate and install, run it.....	6
2.5 Assign Speed-Dial number for your contact list.....	7
2.6 Enjoy to make/answer Skype calls like your regular phone.	7
3 Using the USB Phone to call.....	8
3.1 Before you call.....	8
3.2 Make A Call	8
3.3 Answer a call	8
3.4 Using SkypeOut	8
4 Trouble Shooting.....	9
5 FAQs	9

1. Introduction

Thank you for purchased our product. This manual provides instructions for installing and operating the USB P3K for Windows 98/ME/2000/XP. It included how to install the software and hardware, FAQs, Troubleshooting. For more updated information. Please visit our web site: <http://www.mplat.com>

Attention: How to use Skype is not included in this manual. To learn more detailed information about Skype, please visit its official website <http://www.skype.com>.

1.1 Overview

The USB P3K is USB phone for Skype Voice communication. After you installed Skype and register your user name, simply plugging USB P3K into the USB port of your PC or laptop, You can make/answer Skype calls like your regular telephone. It is easy-to-use for both office and home accessing Skype.

Key Features

- ▣ Make/receive VoIP calls
- ▣ Rings loudly on an incoming call
- ▣ Caller ID function of VoIP calls
- ▣ PC-to-PC, PC-to-USB phone, USB Phone to USB Phone operation
- ▣ Driver built-in, no need additional driver or plug-in software
- ▣ Plug-and-play,USB1.1 compatible, No external power/sound card required .
- ▣ Echo cancellation, noise reduction
- ▣ Full-duplex communication with crystal clear speech
- ▣ 199 incoming call and 199 dial number With LCD and LED show
- ▣ ACR (Auto Calling Router) function
- ▣ Complies with H.323, MGCP, SIP protocol
- ▣ Hand-free, redial, flash
- ▣ KeyPad:Redial, In, Out, Up, Down, Del, Flash.
- ▣ Direct-call button to the partner shop available
- ▣ Customized hand phone casing designs available

System Requirements

- ▣ Microsoft Windows98/ME/2000/XP
- ▣ Pentium 400MHz above processor/128MB RAM/16MB free hard disk capacity
- ▣ One USB port available, USB version 1.1
- ▣ Internet connection (ADSL, Cable Modem, Dial-UP, Wireless LAN)
- ▣ Installed the Skype software and registered a user name.
- ▣ Power on your computer when you use the USB P3K

1.2 Package list

When you receive your **USB P3K**, check to make sure that your package contains:

- ▣ One USB P3K


USB-P3K



- ▣ One USB cable.




- ▣ User's manual



2. Quick Start

1. Plug-in USB Phone to PC usb port , the LCD shows "VOIP- Phone".
2. Download the Skype software and apply an account if you don't have account.
3. Install and launch Skype.
4. Download SkypeMate software from <http://www.mplat.com> and install, run it.
5. Assign Speed-Dial number for your contact list.
6. Enjoy to make/answer Skype calls like your regular phone.

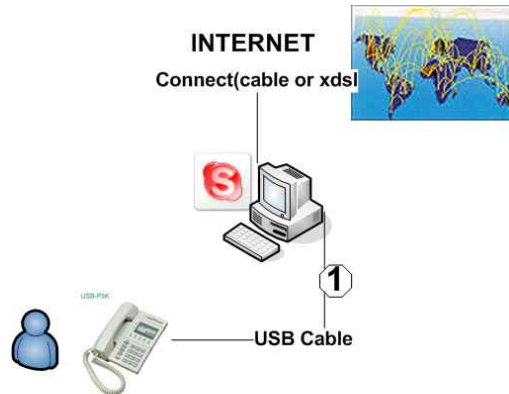

How to install USB P3K

2.1 Plug the USB P3K into the USB port

The hardware installation is very simple. All you need to do is to connect the USB P3K 's cable to the USB port on your PC. The Power status LED on the USB P3K will be on and display "VOIP- Phone".

ATTENTION: Check the USB cable interface, If not match. Don't plug hardly. Try other side.



The USB P3K supports the Windows Human Interface Device and USB Audio Device 1.0 standards. If you are connecting the phone for the first time and your operation system is Microsoft XP, Windows will automate detect a new device and install drivers. There is no need for any special drivers.

Attention: When installing the USB phone under Windows98/ME, you will need to confirm a few dialogs displayed by the New Hardware Installation Wizard.

How to check whether the USB phone has been successfully installed in Windows?

Please follow the procedures below.

“Starts” → “Setting” → “Control Panel” → “System” → “Hardware” → “Device Manager”

When the following three devices appear in the **Device Manager**

- USB Audio Device
- USB Composite Device

2.2 Download the Skype software and apply an account if necessary

If you didn't use Skype before, please download the latest Skype software at



<http://www.skype.com/download/redirect>

And apply an account at


<https://secure.skype.com/store/member/login.html>

2.3 Install Skype and launch Skype


Follow the Skype software Installation Wizard and install Skype.

Run launch Skype and login with Skype account. Your notification area at window taskbar will display  or .




 Means Skype connect successfully.

 Means Skype connect unsuccessfully. Please check your internet connection.

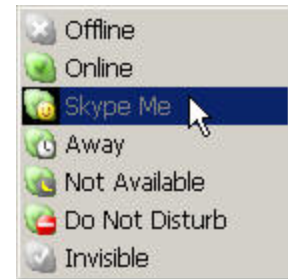ATTENTION: Before you do next step, we advise you use Skype by computer to make sure your internet connection and installation is successfully.



2.4 Download SkypeMate software from <http://www.mplat.com> and install, run it.

- ▣ Download SkypeMate software from <http://www.mplat.com> and install it
- ▣ Run SkypeMate, After running SkypeMate, there is a icon:
 -  Device and Skype are connected successfully;
 -  Please run Skype first;
 -  The USB Phone connected incorrectly, please reconnect again.

2.5 Assign Speed-Dial number for your contact list.

- For example. If you want call rabbittu. First look for it in your contacts list. And Assign Speed-Dial for it, for example "11".




- Using the same way to assign speed dial to another contact people. For example "12"



- After you finish your assignment, the match should like:
11---- Your friend one.
12---- Your friend two.

- Of course you can assign other special number. Like "888" or "1111"

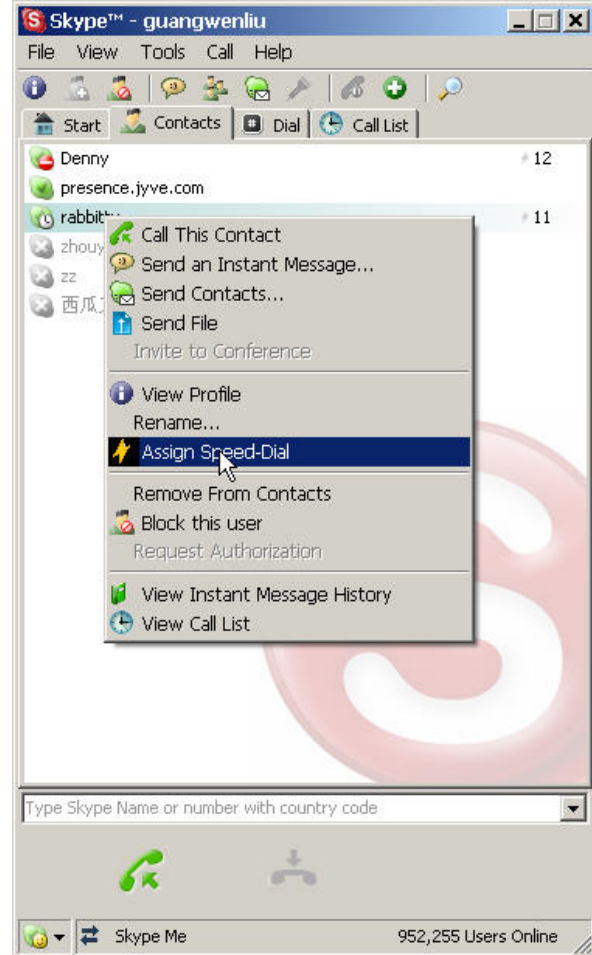

2.6 Enjoy to make/answer Skype calls like your regular phone.


Now you use your USB phone like regular phone to call your friend. For how to make a call and answer a call. You can read next chapter.

3 Using the USB Phone to call


3.1 Before you call

Make sure you have read previous chapter and configure correctly. Also assign the speed dial to your friend. We advise you print your contact list and speed dial number.

3.2 Make A Call

1. Dial "11" on phone, this number will be shown in the Skype window. And then press the SEND key , Skype will call out.


Remember: The number "11" have been assigning to your friend previous time. If you haven't assigned this number, you should assign at your computer. Skype will popup a box. Press the number you want, then check number and input again. If the main window of Skype is inactive, click the mouse button to focus it.

2. Using same way to call you other friend, for example, Dial "12"  " to contact other friend.

3.3 Answer a call

The USB phone rings loudly on an incoming Skype call. Simply pickup the handset to answer the call and hang up the handset after you finish the call. You can use any function which you regular phone had. Like regular phone.

3.4 Using SkypeOut

No all people use internet call; sometimes you need contact your friend by regular telephone number. Press "00"+"country number"+"phone number"+" " can start the SkypeOut.

Attention: This service is not free. If you want use this function. You should buy SkypeOut credit from <http://www.skype.com>. For more call rate information. Please visit the official web site <http://www.skype.com>.

4 Trouble Shooting

For the latest information about the Trouble Shooting and the FAQ, please visit <http://www.mplat.com/support.asp>

▣ Problem 1.

The phone doesn't ring when there is an incoming call.

Click on **File->Options**, and go to the tab **Call Alerts**. Select **Play ringtone** in the tab **Call Alerts**. Click **Save** to accept the changed configuration.

▣ Problem 2

The speech is played from the PC's sound card instead of the regular phone.

Click on **File->Options**, and go to the tab **Hand/headsets**.

On the screen, you can see three sound device settings. Please set **Audio in**, **Audio out** and **Ringin**g to the USB P3K device. Make sure that the check box **Disable Skype support for USB Device** is unchecked.

5 FAQs

▣ Question 1

When I unplug the USB Phone and use the computer .My computer have not voice, what happened?

After you connect the USB P3K, the default audio device in the system will change to "USB Audio Device". So, if the USB P3K is disconnected, To play the music from your speaker, you should set your PC's sound card as the preferred audio device. Please follow the steps below: "Start" → "Settings" → "Control Panel" → "Sound and Multimedia" → "Audio" →

When the corresponding window appears, please check if the preferred devices for "Playback" and "Recording" are your PC's sound card.

▣ Question 2

Does USB P3K is able to work with other PC-based softphone applications?

The USB P3K can work fine with Skype and other PC-based softphone. Also support standard audio device in Windows so you can set the USB P3K as audio input/output. It hasn't totally test for MSN. Yahoo Message. MediaRing. Net2phone. We will update this information soon.

▣ Question 3

Does the phone support other platforms such as Mac OS, Linux, Palm OS and Packet PC?

No. it doesn't work with other platform. But we will update this information soon. For updated information, Please visit our web site, <http://www.mplat.com>


▣ **Question 4**

Why sometime I can hear an echo of myself with half a second delay?

In the USB P3K, There are special designed electro circuit to eliminate echo, However you would suffer with echo if the other side uses desktop speakers and a separate microphone because your speech played from his speaker would come back through his microphone. So just ask he change the direction of microphone to avoid echo.

▣ **Question 5**

How can I adjust the volume and ringer?

In the SkypeMate, Double click the  on the taskbar, then you can adjust the volume and ringer.